
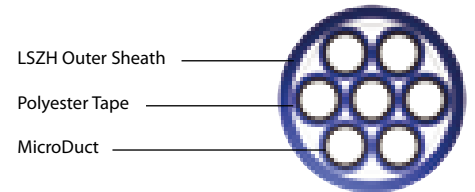


Air Blown Fibre Systems

BLOLITE+



Brand-Rex Air Blown Fibre - Blolite+

Blolite+ Internal MultiDucts

Product Data

	Diameter	Weight	Max Tensile Load	Min Static Bend
	mm	kg / km	N	mm
1w 3mm (LSZH) - I	5.0	29	70	100
4w 3mm (LSZH) - I	9.3	67	150	120
7w 3mm (LSZH) - I	11.7	89	400	120
19w 3mm (LSZH) - I	17.7	165	1000	270
Single 5mm MicroDuct	5.0	32	50	25
2w 5mm (LSZH) - I	7.5 x 13.0	73	300	40
4w 5mm (LSZH) - I	15.2	129	500	128
7w 5mm (LSZH) - I	18.6	203	700	180
12w 5mm (LSZH) - I	24.0	362	1150	350
19w 5mm (LSZH) - I	29.6	440	1650	410
Single 8mm MicroDuct	8.0	32	120	40
2w 8mm (LSZH) - I	10.5 x 19.0	135	600	80
4w 8mm (LSZH) - I	23.0	265	1000	180
7w 8mm (LSZH) - I	27.6	380	1500	270
12w 8mm (LSZH) - I	36.0	--	--	--

Available with 3mm, 5mm or 8mm MicroDucts

Non Metallic Design

Simple MicroDuct Identification

PRODUCT DESCRIPTION:

To facilitate the installation of Blolite+ single blown fibres a range of multi-way MicroDucts into which Blolite+ fibres, can be blown are available. The internal range of these MultiDucts are constructed with the standard Blolite+ MicroDuct surrounded with a layer of polyester tape and a LSZH outer sheath making them suitable for internal applications.

PRODUCT PERFORMANCE:

Fire:

IEC 60332-1

Temp - Operation:

-20°C to +60°C

Temp - Storage:

-40°C to +80°C

Temp - Installation

-10°C to +70°C

Product Part Numbering

	3.00mm	5.00mm	8.00mm
Single MicroDuct	n/a	20-0101-00	20-0104-00
1 Way MultiDuct	20-0103-06	n/a	n/a
2 Way MultiDuct	n/a	20-0201-06	20-0204-06
4 Way MultiDuct	20-0403-06	20-0401-06	20-0404-06
7 Way MultiDuct	20-0703-06	20-0701-06	20-0704-06
12 Way MultiDuct	n/a	20-1201-06	20-1204-06
19 Way MultiDuct	20-1903-06	20-1901-06	n/a