
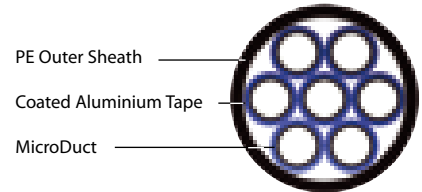


Air Blown Fibre Systems

BLOLITE+

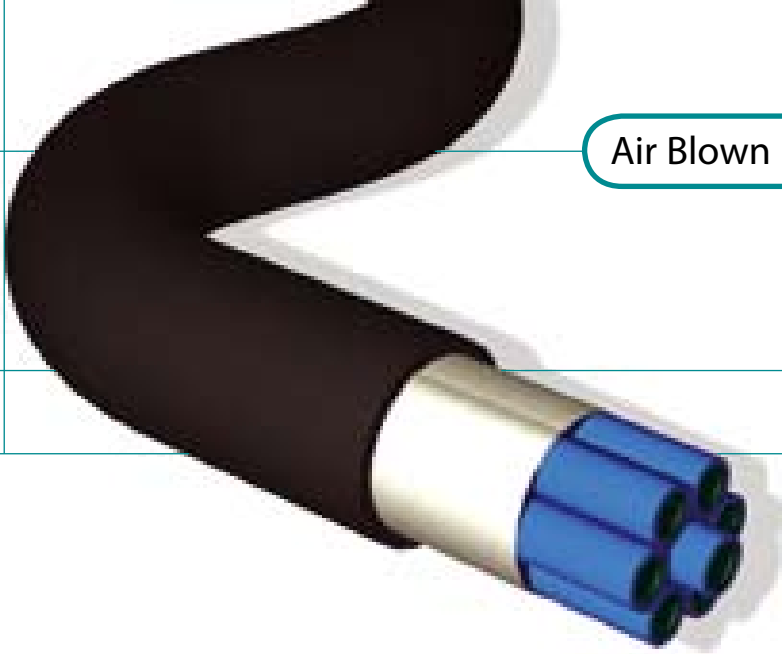

Brand-Rex Air Blown Fibre - Blolite+ Blolite+ External MultiDucts

Product Data

	Diameter	Weight	Max Tensile Load	Min Static Bend
	mm	kg / km	N	mm
1w 5mm (LSZH) - O	7.5	32	380	40
2w 5mm (LSZH) - O	7.5 x 13.0	73	630	60
4w 5mm (LSZH) - O	15.2	129	900	180
7w 5mm (LSZH) - O	18.6	203	1250	250
12w 5mm (LSZH) - O	24.0	-	1800	310
19w 5mm (LSZH) - O	29.6	-	2600	370
1w 8mm (LSZH) - O	10.5	32	-	80
2w 8mm (LSZH) - O	10.5 x 19.0	135	-	95
4w 8mm (LSZH) - O	23.0	265	-	280
7w 8mm (LSZH) - O	27.6	380	-	380
12w 8mm (LSZH) - O	36.0	-	-	-

Available with 5mm or 8mm MicroDucts

Aluminium Moisture Barrier

MicroDuct Numbered for Identification

PRODUCT DESCRIPTION:

To facilitate the installation of Blolite+ single blown fibres a range of multi-way MicroDucts into which Blolite+ fibres can be blown are available. The external range of these MultiDucts are constructed with the standard Blolite+ LSZH MicroDuct surrounded with a layer of coated aluminium tape and a Polyethylene outer sheath making them suitable for external applications.

PRODUCT PERFORMANCE:

Temp - Operation:

-20°C to +60°C

Temp - Storage:

-40°C to +80°C

Temp - Installation

-10°C to +70°C

Product Part Numbering

	5.00mm	8.00mm
1 Way MultiDuct	21-0101-02	21-0104-02
2 Way MultiDuct	21-0201-02	21-0204-02
4 Way MultiDuct	21-0401-02	21-0404-02
7 Way MultiDuct	21-0701-02	21-0704-02
12 Way MultiDuct	21-1201-02	21-1204-02
19 Way MultiDuct	21-1901-02	n/a