

ECS-7710

10,4" TFT touchscreen control panel with DVR/PTZ control



ECS-7710 T



ECS-7710 C

Specifications

Display size: 10,4" (211 x 158 mm)

Display resolution: VGA 640 x 480, 65.536 colours

Controller hardware: 32 bit-RISC-CPU, 133 MHz, 8 MB

Interfaces: 2 x USB, 1 x RS-232, 2 x RS-485

Video input: 4 x BNC FBAS, 75 Ohm terminated

Optional interfaces: CAN / MPI S7 / PPI S7 / Profibus DP / Ethernet

Mounting:

ECS-7710 T: desktop version standard VESA mount 75/100 mm, optional with stand base BA-DW 140 or with brackets BA-DW 151/161/170/171

ECS-7710 C: built-in type, cutout 299,5 x 227,5 mm

Power input: 12 V DC / 24 V DC, 650 mA typical, 850 mA max.

Casing: aluminium / steel


Ambient temperature: 0°C ~ +50°C

Dimensions:

ECS-7710 T: 302 (W) x 217 (H) x 73 (D) mm

ECS-7710 C: 361 (W) x 297 (H) x 69 (D) mm, cutout 299,5 x 227,5 mm

Menu structure

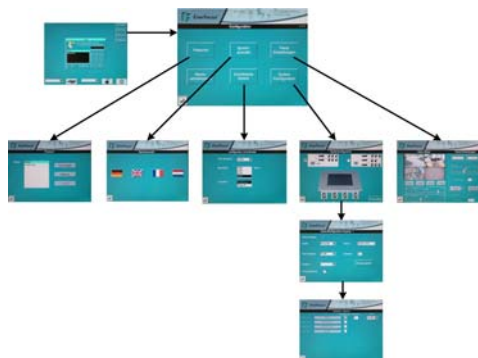

Features

- touchscreen control of EverFocus EDR / EDSR series' DVR via RS-485 interface (up to 1200 m distance)
- RS-485 interface pin – compatible to PTZ control with EverFocus and Pelco-D protocol
- 4 video inputs allow for control of 4 CCTV systems (DVR, PTZ camera)
- easy, intuitive system setup with graphic user interface (GUI)
- 2 housing versions: built-in type (ECS-7710 C) and desktop housing (ECS-7710 T) for VESA mount

Accessories: ECS HCS 10 – sleeve for dry wall or in-wall mounting



Material: steel

Outer dimensions: 345 (W) x 267 (H) mm

Inner dimensions: 325 (W) x 248 (H) mm


Depth: 65mm

Weight: 2,6 kg


Application: with ECS 7710 C

ECS7710_db_en_rev01


System example with TFT touchscreen control panel ECS 7710 T / direct connection

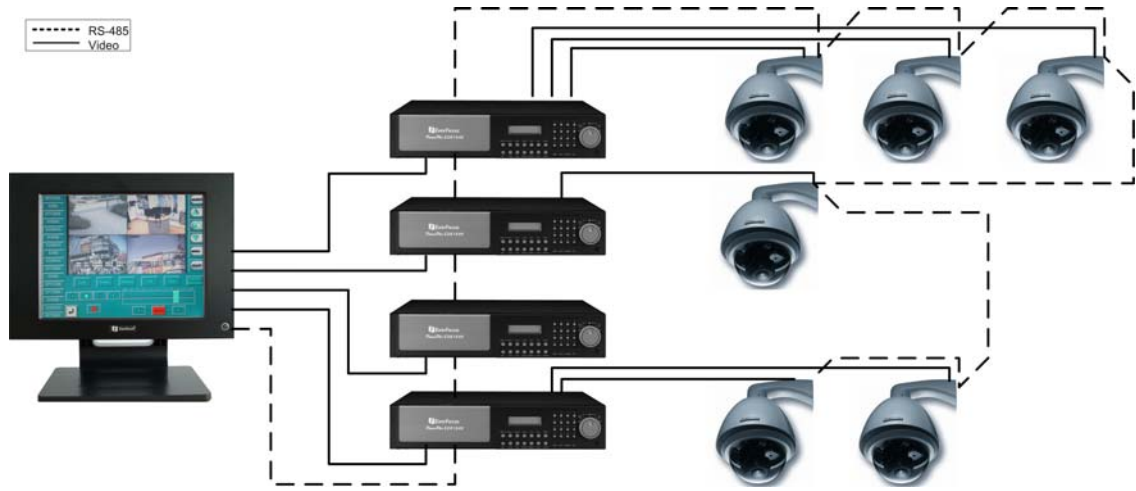

System example with TFT touchscreen control panel ECS 7710 T / cascading I

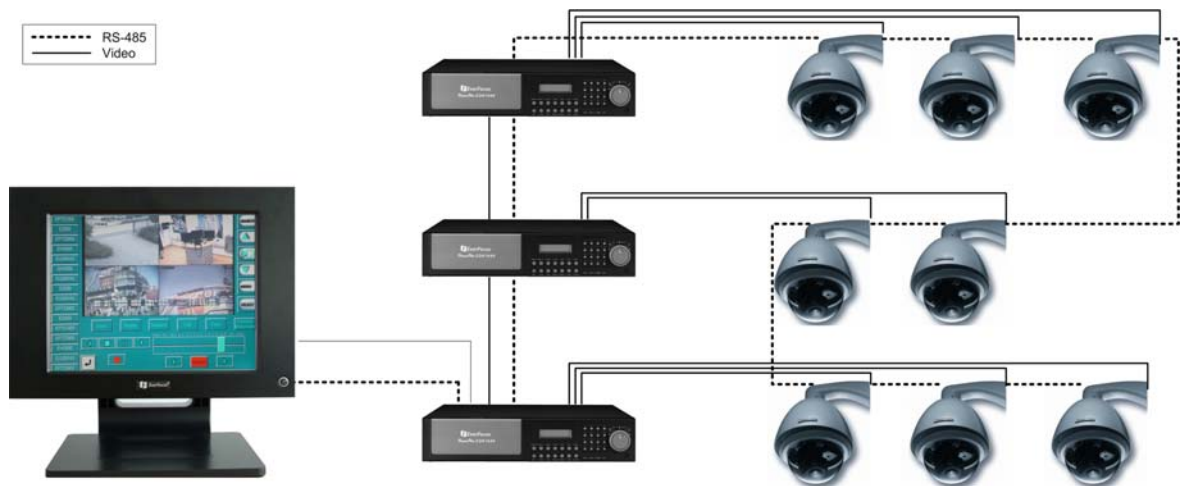

System example with TFT touchscreen control panel ECS 7710 T / cascading II

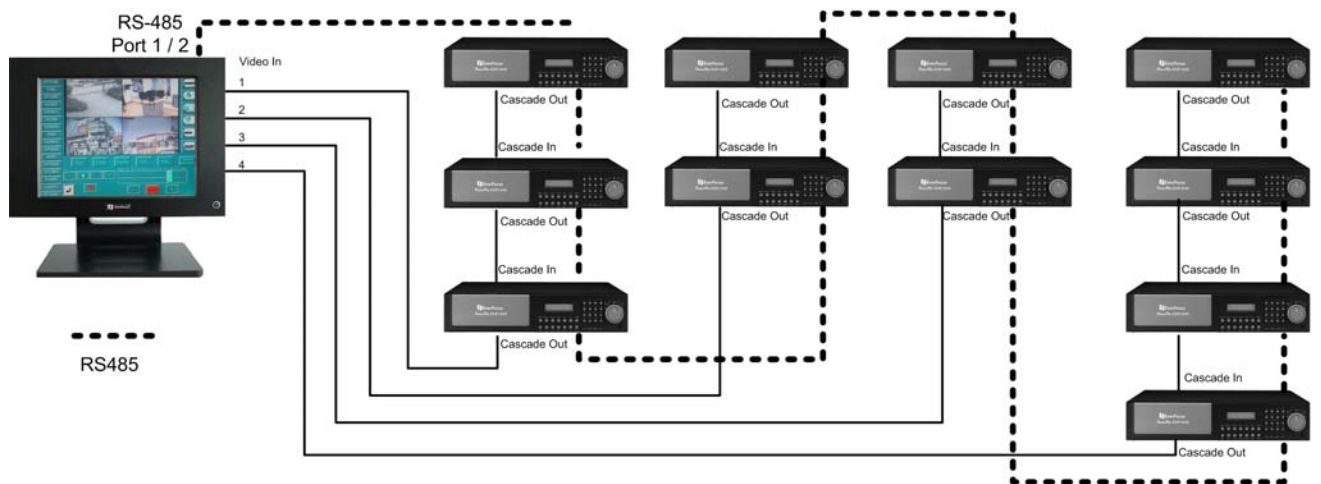

ECS7710_db_en_rev01