


Category 5e Systems

GIGAPLUS

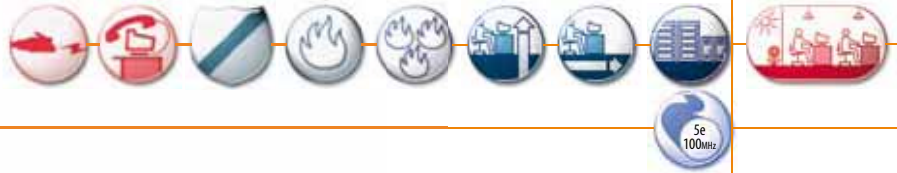

- ISO/IEC 11801 : 2002
- ISO/IEC 61156-5
- EN 50173-1 : 2002
- EN 50288-3-1
- ANSI/TIA/EIA 568B.2 : 2002

Brand-Rex Copper Cables - GigaPlus

Communication Cable, U/UTP, 100 Ω, 4x2xAWG 24/1



Independent 3rd Party Certification (3P)

PRODUCT DESCRIPTION:

GigaPlus U/UTP 100 Ω 4x2xAWG 24/1 premium grade Class D/Cat5e cable to support Gigabit Ethernet protocol for installation in horizontal and backbone areas.

PRODUCT PERFORMANCE:

- Core**
- Conductor: 24 AWG Plain Annealed Copper Wire
 - Insulation: Polyolefin
 - Diameter: 0.94mm Nominal
 - Pair: 2 of the above cores
 - Pair Colour: Blue-White, Orange-White, Green-White, Brown-White

Final Assembly

- Cable: 4 of the above pairs
- Sheath: PVC or LSZH compound

Mechanical and Environmental

- Temp - Installation: 0°C to +50°C
- Temp - Operation: -20°C to +75°C
- Max Tensile Load: 10kg per simplex cable (installation)
- Min Bend Radius: 8 x Outer Diameter (installation), 4 x Outer Diameter (operation)

Packaging

- RLX 305m Reelex Box
- 500m Reelex Box
- WRL 500m Wooden Reel
- 1000m Wooden Reel

Electrical Characteristics @ 20°C	Specification	Typical Performance
Conductor Loop Resistance	Max 19 Ω / 100m	16 Ω / 100m
Conductor Resistance Unbalance	Max 2%	0.5%
Dielectric Strength	1.0kV dc or 0.7kV ac for 1 min	100% in process test
Insulation Resistance	>500MΩ.km @ 100-500 V test voltage	>5 GΩ.km
Capacitance Unbalance to Earth	Max 160 pF/100m	40 pF/100m
Velocity of Propagation	<534 nsec/100m @ 100MHz	496 nsec/100m @ 100MHz (NVP for hand held testers = 0.69)
Skew	Max 40 nsec/100m @ 100MHz	25 nsec/100m @ 100MHz
Mean Characteristic Impedance	100 Ω +/- 5 Ω @ 100MHz	100 Ω +/- 3 Ω @ 100MHz
Coupling Attenuation up to 1GHz	Min 40 dB	50dB

Frequency (MHz)	1	4	10	16	20	31.25	62.5	100	155	200	250
Insertion Loss (dB/100m)	Spec	2.1	4.0	6.3	8.0	9.0	11.4	16.5	21.3	na	na
	Typical	1.8	3.6	5.8	7.4	8.3	10.5	15.3	19.8	25.4	33.4
NEXT (dB)	Spec	65.3	56.3	50.3	47.3	45.8	42.9	38.4	35.3	na	na
	Typical	73.3	64.3	58.3	55.2	53.8	50.9	46.4	43.3	40.4	38.8
PSNEXT (dB)	Spec	62.3	53.3	47.3	44.2	42.8	39.9	35.4	32.3	na	na
	Typical	71.3	62.3	56.3	53.2	51.8	48.9	44.4	41.3	38.4	36.8
ELFEXT (dB / 100m)	Spec	63.8	51.8	43.8	39.7	37.8	33.9	27.9	23.8	na	na
	Typical	78.8	66.8	58.8	54.7	52.8	48.9	42.9	38.8	35.0	32.8
PSELFEXT (dB / 100m)	Spec	60.8	48.8	40.8	36.7	34.8	30.9	24.9	20.8	na	na
	Typical	76.8	64.8	56.8	52.7	50.8	46.9	40.9	36.8	33.0	30.8
Return Loss (dB/100m)	Spec	na	23.1	25.0	25.0	25.0	23.6	21.5	20.1	na	na
	Typical	25.0	28.0	30.0	30.0	30.0	38.6	26.5	25.1	23.8	23.0
ACR (dB/100m)	Typical	71.5	60.7	52.5	47.8	45.5	40.4	31.1	23.5	15	9.4
	PSACR (dB/100m)	69.5	58.7	50.5	45.8	43.5	38.4	29.1	21.5	13	7.4

Product Part Numbering

Part Number	GPU	GPU-D	GPU-HF1	GPU-HF1-D	GPU-HF3	GPU-HF3-D
Outer Sheath	PVC	PVC	LSZH	LSZH	LSZH	LSZH
Construction	Simplex	Duplex	Simplex	Duplex	Simplex	Duplex
Cable Weight	31.0 kg/km	62.0 kg/km	32.5kg/km	65.0 kg/km	44.0 kg/km	88.0 kg/km
Calorific Value	0.11 k Wh/m	0.22 k Wh/m	0.11 k Wh/m	0.22 k Wh/m	0.18 k Wh/m	0.36 k Wh/m
Outer Diameter (nom)	4.85mm	9.8 x 4.85mm	5.0mm	10.1 x 5.0mm	5.8mm	11.7 x 5.8mm
Sheath Colour	Grey RAL 7037	Grey RAL 7037	Violet RAL 4005	Violet RAL 4005	Blue RAL 5015	Blue RAL 5015
Fire Safety Rating	IEC 60332-1-2	IEC 60332-1-2	IEC 60332-1-2	IEC 60332-1-2	IEC 60332-3-24	IEC 60332-3-24
Acid Gas Emissions	na	na	IEC 60754-1	IEC 60754-1	IEC 60754-1	IEC 60754-1
Smoke Index	na	na	IEC 61034	IEC 61034	IEC 61034	IEC 61034
Packaging	RLX / WRL	WRL	RLX / WRL	WRL	WRL	WRL